


Flight type dishwashers– NE1-P6

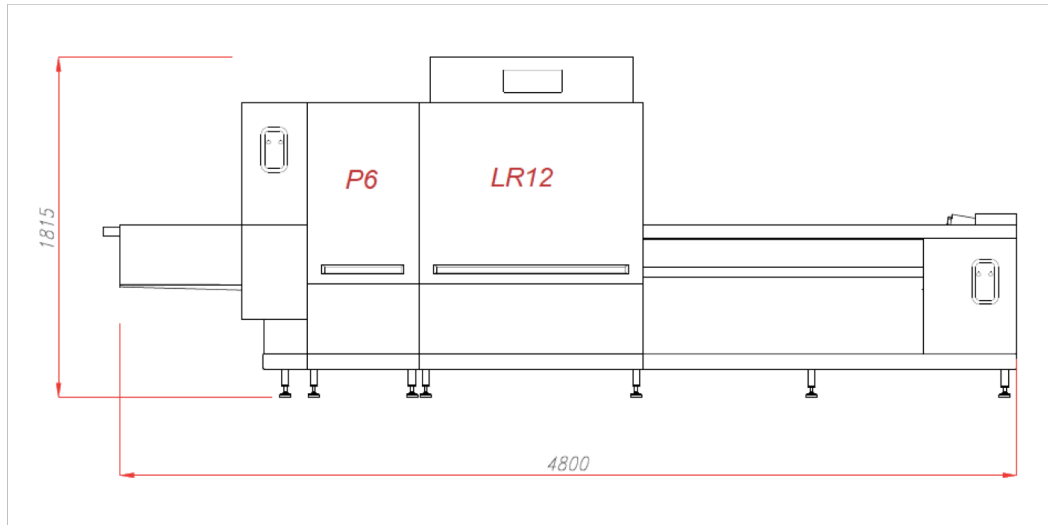

Brief description

Flight type dishwasher, 2 speeds, counterbalanced insulated doors and double walled insulated body. 1000mm Load section c/w extractable filters and splash shield with start/stop buttons and emergency switch - 600mm P6 Upper/Lower Prewash - 1200mm LR12 Upper/Lower/Side Wash

and single rinse - 2000mm unload section c/w splash shield with start/stop buttons and emergency switch - top mounted DIGIT controls, EOR

Key features

Conveyor speed(DIN 10510)	1,08 m/min	Power supply	400V 3N~
Conveyor speed (Maximum)	1,45 m/min	Frequency	50/60 Hz
Rinse water consumption	440 l/h	Unit connection load (hot water)	37,4 kW ●
Tank capacity	170 liters	Unit connection load (cold water)	60,4 kW ●
Total length.....	4800 mm	Sensible capacity	5,5 kW
		Latent capacity	16,5 kW

Standard features

Machine completely constructed in AISI 304 stainless steel
Max. Wash dimensions: mm 620 x 430h.

Conveyor belt drive system

Single motor gear with 2 speed.
Belt drive control system through mechanical torque limiter. 60 mm finger belt distance. 8mm stainless steel conveyor belt shafts. Single stainless steel spacers between the shafts.

Electric panel

IPX4 protection.

Front control panel with push buttons and led indicators under a protective membrane.

Electronic controls.

Digital display for temperature and machine status
24V AC rated control circuit. Circuit breakers to protect motors and heaters.

Main switch fitted as standard. Lockable in the machine-off position by means of a padlock.

External machine data plate showing unit serial number, electric load, complete with QR code for technical documentation download. EOR,


Emergency override – funzionamento elettromeccanico d'emergenza a chiave

Standard configuration

	<p>Prewash</p> <p>In this zone food residue is removed thanks to the large circulation pump and the easy-to-extract manifolds system in stainless steel with deep drawn jets.</p> <p>Module length 600 mm</p> <p>Wash pump 1,50 kW</p> <p>Tank volume 60 l</p>
	<p>1st Wash</p> <p>In this zone food residue is removed thanks to the combined action of detergent and large circulation pump together with easily extractable upper and lower manifold.</p> <p>Module length 1200 mm</p> <p>Wash pump 2,70 kW</p> <p>Tank heater 16,0 kW</p> <p>Tank volume 110 l</p>
	<p>Rinse</p> <p>In this zone, the dishware is rinsed with fresh hot water.</p> <p>Rinse water flow (@ DIN speed) 440 l/h</p> <p>Booster heater (@ 55°C) 17,0 kW ●</p> <p>Booster heater (@ 15°C) 40,0 kW ●</p>

Accessories


800 mm AS Blower Dryer



The air for the dryer is heated in a battery with heaters and blown on the dishware from the upper side.

Module length	800 mm
Dryer fan power input	0,42 kW
Dryer heaters	9,0 kW
Sensible Capacity	18,7 kW
Latent Capacity	18,6 kW


800 mm ARC Blower Dryer with Heat Recovery Unit



It allows the hot and humid air flow created inside the machine to be utilized.

Total connection load becomes (cold water connection)	52,9 kW	●
Module length	800 mm	
Sensible Capacity	9,8 kW	Latent Capacity
		17,5 kW
Dryer Fan power input	0,42 kW	Dryer heaters
		9,0 kW
Single point air extraction		

DHM Automatic Pre-Scrapping System



600mm Prewash section c/w pump and extractable drawer filtering system

Module length	600 mm
Wash pump	0,30 kW
Tank volume	22 l

Options

APRS Automatic Proportional Rinse System (Autotimer Automatic Reset included)

Patented system which allows to reduce up to 30% dishwasher consumptions adapting automatically the water, energy and chemicals according to the work load.

Autotimer Automatic Reset

The timer-operated wash cycle enables the pumps to be stopped when there are no racks inside the machine. The machine automatically starts to operate again when new rack is loaded. This solution achieves considerable energy savings.

Central Drain

Any single tank drain is connected together in a central drain.

E5 Electronic with PLC with upper control panel

The last-generation electronic control panel allows use and control of the machine by means of a high-resolution touch sensitive 7-Inch display with an integrated diagnostic system.

Remote connection for E5

To communicate remotely with your equipment and ensure data can be downloaded, anomalies identified and operating parameters reset in real time and from whenever you are.

HPS EASY

A dedicated display enables the operators to keep a daily check on water and energy consumption and to be advised on any operational default.

HPS EASY PLUS

To store HACCP data on internal memory and copy them on a USB memory stick.

RAH Rinse Aid Homogenizer

It uniformly mixes rinse water and rinse agent. Reducing rinse aid consumption by 70%.

Sanitizing System

In each prewash, wash or rinse area, arms with adjustable nozzles are aimed at internal surfaces to guarantee maximum hygiene.

RCD Rinse Control Device

It combines an atmospheric booster and a rinse booster pump and ensures at a constant temperature throughout the cycle.

DHM

Additional prewash section c/w extractable drawer filtering system, removable with machine in operation (no downtime). Tank water periodically integrated with mains water. Replaces the extractable filters in the load section of the selected model.

Rinse Aid Injector

Sanitizing System - each additional tank

Booster pump for Sanitising system

TD Thermo disinfection


Liquid Detergent Injector

Special voltages

230V 1~ 50 Hz
230V 1~ 60 Hz
230V 3~ 50 Hz
230V 3~ 60 Hz
440V 3~ 60 Hz
480V 3~ 60 Hz

Marine execution

Installation drawing

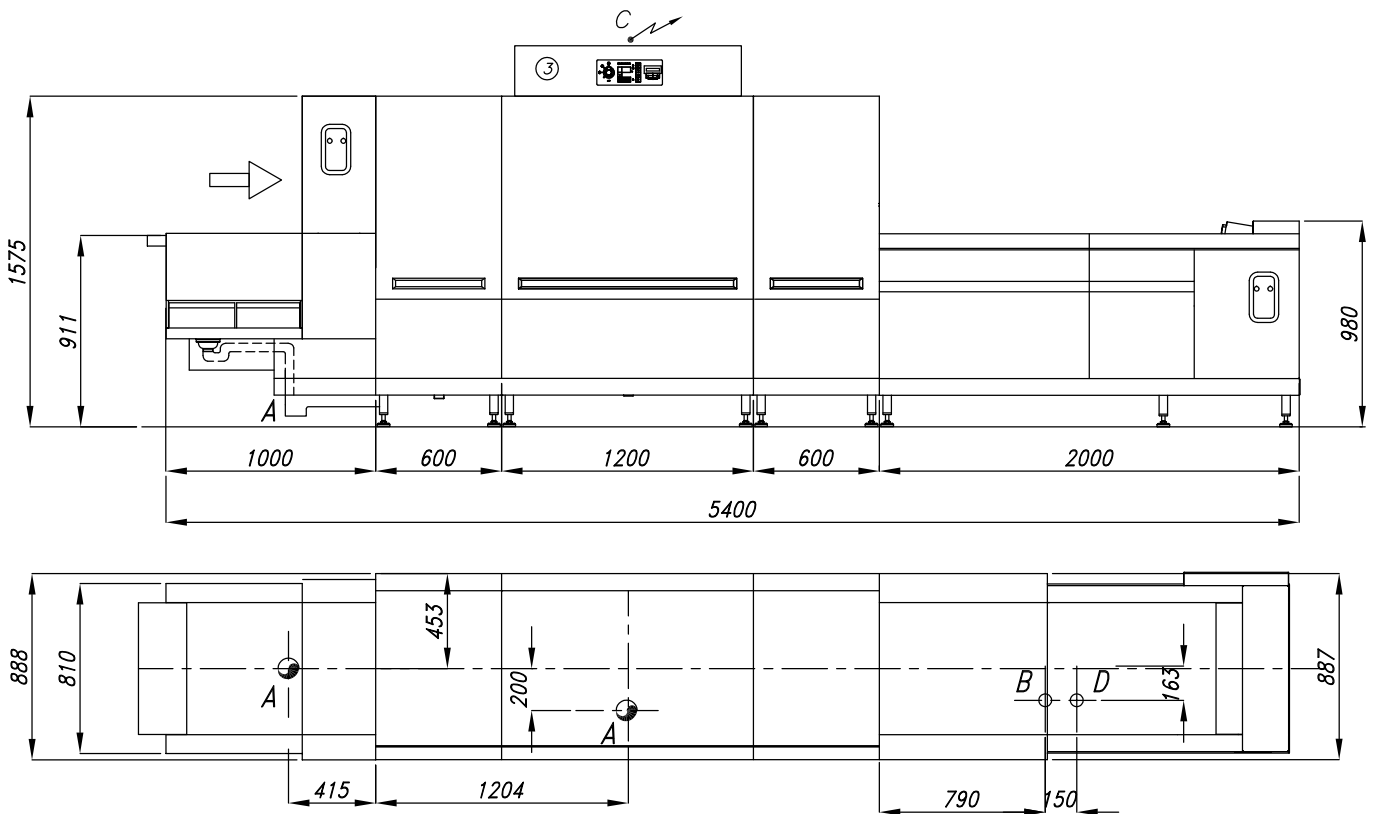

Feeding direction: left / right

The drawing refers to the standard machine with no optional.

Please enquire for the installation drawing relevant to the configuration selected.